



SKU 430 UVB Sensor

Skye Instruments Ltd have been designing and manufacturing quality, fully calibrated light sensors since 1983.

Skye offer sensors to measure light levels in the Ultraviolet A and Ultraviolet B wavebands. The wavelengths used in these sensors are according to DIN 5031 part 7. This leaflet describes the UVB sensor.

The dimensions and overall look of these sensors are similar to that of our other sensors. The housing is black aluminium and sealed to IP67 standards, making them suitable for short term underwater use.

Skye guarantees sensors to a depth of 4 meters for short term immersion. The light collecting head utilises a UV stable polymer and is cosine corrected. The sensors have been designed with an integral amplifier to give a voltage output for use with most dataloggers, computers, PLCs, etc.

Sensors calibration is traceable to NPL and each sensor is issued with a calibration certificate.



Climatology, meteorology
UV effects on ecosystems
Marine biology, ecology, zoology
Studies of plant/animal responses to rising UV levels
To monitor exposure of test samples in natural & other UV sources

SKU 430 SPECIFICATIONS

Construction - Anodised black aluminium, sealed to IP67 Submersible to 4m
Short term submersions only. Please contact us for greater depths

Cable - Screened, 7+4C military specification. Cable gland on sensor housing.

Sensor - Cosine corrected head. Specially formulated diffuser.

Detector - SiC Photodetector

Spectral Response (1) - 280nm - 315nm

Working Range (2) - 0.10 W/m²

Output Signal - 0.1V

Sensitivity - 150 mV / W/m²

Thermal Drift of Output (-20 to +50°C) - 0.075mV/°C max

Thermal Drift of Zero Offset (-20 to +50°C) - Typically 0.03 mV/°C

Output Impedance - 500

Power Supply - 5-15VDC

Absolute calibration error (3) - typ. <3%, 5% max

Cosine error (4) - 3%

Azimuth error (5) - <1%

Longterm stability (6) - +/-2%

Response time (7) - better than 10ms



Temperature coefficient - +/-2%

Weight - 200g (with 3m cable)

Temperature range -30 to +60°C

Mounting - M6 x 7mm topped hole in base. Sensor supplied with. M6 x 16mm screw + 4x 1.5mm washers to suit panel thickness of 310mm

Dimensions -

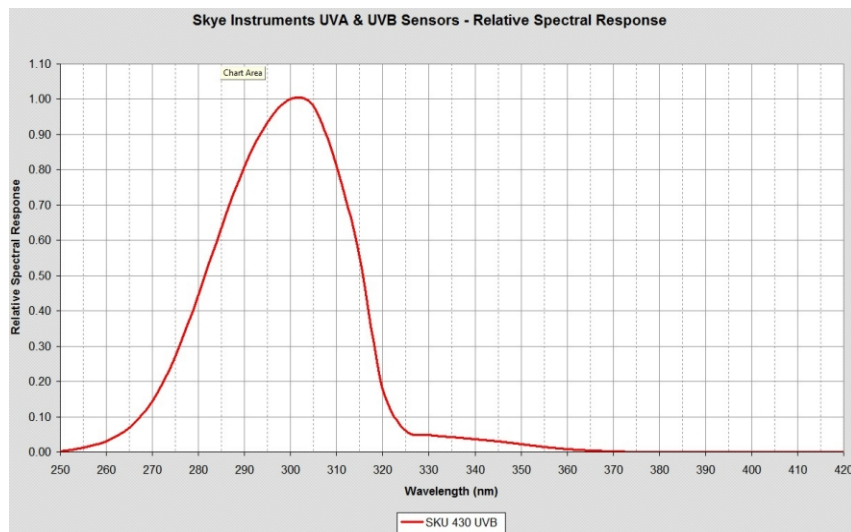

NOTES ON SPECIFICATIONS

- (1) FWHM or 50% transmission
- (2) All standard Skye sensors will work at levels of irradiance well above that found in terrestrial sunlight conditions, room or growth chamber lighting
- (3) Main source of this error is uncertainty of calibration of Reference Lamp. Skye calibration standards are directly traceable to N.P.L. standard references.
- (4) Cosine error to 80° is typically 5% max. Figures shown are for normal use sources, e.g., sun plus sky, diffuse sun, growth chambers, etc.
- (5) Measured at 45° elevation over 360°
- (6) Maximum change in one year. Calibration check recommended at least every two years. Experience has shown that changes are typically much less than figures quoted
- (7) Times are generally less than the figure quoted, which is in nanoseconds. They may be slightly increased if long leads are fitted, or those of a higher capacity cable

ORDERING INFORMATION

Sensors:

SKU 430 UVB sensor with 3m cable and DataHog connector
SKU 430/SS2 UVB sensor with 2m cable and SpectroSense2 connector

Accessories: (see separate datasheet)

SKM 222 Levelling unit
SKM 226 Long arm pole/wall mount

Meters and dataloggers: (see separate datasheet)

SKL 904 SpectroSense2 4-channel display meter
SKL 908 SpectroSense2+ 8-channel logging meter
SDL 5000 DataHog2 logger range

Skye Instruments Ltd

21, Ddole Enterprise Park, Llandrindod Wells
Powys LD1 6DF, United Kingdom

TEL +44 (0)1597 824811

EMAIL skyeemail@skyeinstruments.com
WEB <http://www.skyeinstruments.com>